


minilec®

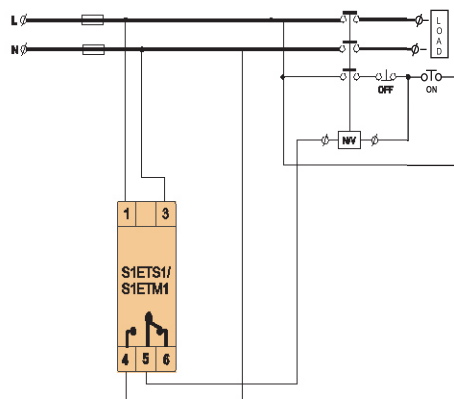

- *On Delay
- *Time range upto 3 hours
- *2 CO output relay

TECHNICAL SPECIFICATIONS:

1. Supply Voltage	100-120/220-240/380-440VAC $\pm 20\%$
Auxiliary	12/24 VDC (-10%/+20%), 24 VAC (-10%/+15%)
2. Output Contacts	1 CO
3. Time Range	0-10 sec. 0-30 sec., 0-60sec.
4. Operating Modes	On Delay
5. Weight	90 gms.
6. Dimensions (mm)	
Overall (L x W x D)	90 x 18 x 60
Mounting (L x W)	35 mm Rail Mounting

Suitable for Panels in Following Applications:

Motor Control Panels

Star Delta Starter Panels

Our Other Products

Alarm Annunciator, Motor/Pump Protection Relays, EOGR,

Phase Failure Relay + UV / OV Relays, Voltage/Current/ Frequency/Reverse Power Monitoring Relays,

Earth Fault/ Leakage Relays, Pump Automation Management system & Controllers, Water Level Controller,

Electronic Timers, Power Line Transducers (V/I/KW/Multi-function/DC-DC Isolators or Barrier/Temp/Resistance/Tap position etc.),

Multi-function Meter, Twin Window/Split AC Controller, Bearing temp Monitoring relays(PT-100)